

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 January 2006 (12.01.2006)

PCT

(10) International Publication Number
WO 2006/002486 A1

(51) International Patent Classification⁷: EOIC 23/09,
23/12, B28D 1/26, 1/22, 1/28, E21C 27/14

(21) International Application Number:
PCT/AU2005/000986

(22) International Filing Date: 4 July 2005 (04.07.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004903639 5 July 2004 (05.07.2004) AU

(71) Applicant (for all designated States except US): CONCRETE SLAB TECHNOLOGY PTY LTD [AU/AU]; Level 2, 67 Astor Terrace, SPRING HILL, BRISBANE, Queensland 4004 (AU).

(72) Inventor; and


(75) Inventor/Applicant (for US only): COCKERELL, Alan David [AU/AU]; Level 2, 67 Astor Terrace, SPRING HILL, BRISBANE, Queensland 4004 (AU).

(74) Agent: GARDNER, John, R., G.; Suite 398, 15 Albert Avenue, BROADBEACH, GOLD COAST, Queensland 4218 (AU).

(54) Title: METHOD AND APPARATUS FOR FORMING CRACKS IN CONCRETE

A1

WO 2006/002486 A1

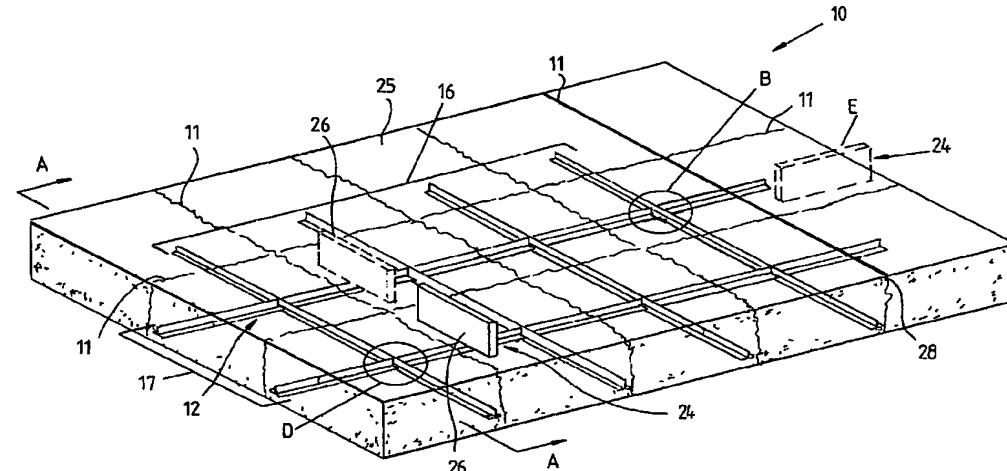

(57) Abstract: A method of forming at least one crack (11) in a concrete article such as a concrete slab (10) having at least one crack promoting groove (28) formed in the surface (25) thereof and/or at least one crack promoting insert (12) cast within the concrete slab (10) and substantially aligned with the groove (28) where used, the method comprising the steps of positioning a tool (24) having a force applying member (26) on or above the surface (25) of the concrete slab (10) such that the member (26) is positioned adjacent to or above a groove (28) and/or insert (12) and causing the tool (24) to apply through the member (26) a force to the concrete slab (10) to promote the formation of a crack or cracks (11) in the slab (10) along a groove (28) and/or insert (12). Apparatus for forming a crack in a concrete article is also disclosed.